

**EPOTEC RD 108**

**Description**

EPOTEC RD 108 is the monoglycidyl ether of C12-C14 aliphatic alcohol. The primary use of RD 108 is as a reactive diluent for high viscosity epoxy resins. RD 108 is compatible at all concentration and those resins and the blends can be cured with variety of epoxy hardners. As with all monofunctional aliphatic epoxies, increasing level of RD 108 will increase pot life and modify cured properties.

**Applications**


- Flooring
- Potting and encapsulation
- General purpose adhesives

**Typical properties**

Property	Test method	Unit	Specification
Appearance	Visual	-	Clear liquid
Color	ASTM D-1544 (89) TEC-AS-P-006	Gardner	Max. 0.5
Epoxy equivalent weight	DIN 16945/4.15B (89) TEC-AS-C-002	g/eq	270 - 313
Viscosity* @ 25°C	JIS K 7233 (86)	cPs	5 - 10

\* Brookfield viscosity

**Figure 1** Effect of % of RD 108 on viscosity of standard epoxy resin

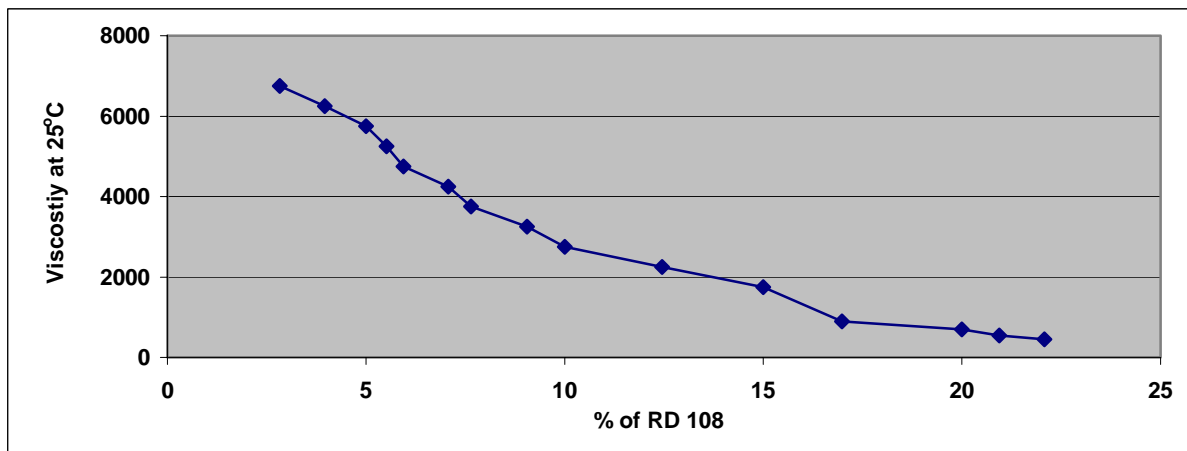

**Storage**

EPOTEC RD 108 should be stored in dry condition and kept closed in original container. Under these conditions, it has a storage life of at least one year.

**Handling**

Please refer to MSDS for safe handling of EPOTEC RD 108.

**Disclaimer**

All recommendations for use of our products whether given by us in writing, verbally or to be implied from the results of tests carried out by us are based on the current state of our knowledge. Although, the information contained in this sheet is accurate, no liability can be accepted in respect of such information. We warrant only that our product will meet the designated specifications and make no other warranty either express or implied, including any warranty of merchantability or fitness for a particular purpose as the conditions of application are beyond our control.

**For additional information:**

**ADITYA BIRLA CHEMICALS (EPOXY DIVISION)**

16<sup>th</sup>FLOOR MAHATHUN PLAZA. 888/160-161 PLOENCHIT ROAD, BANGKOK 10330 THAILAND.

TEL: (662) 2535031-3, 2536882, FAX: (662) 2535030

Website: [www.thaiepoxy.com](http://www.thaiepoxy.com), E-mail: [epotec@thaiepoxy.com](mailto:epotec@thaiepoxy.com)